



► Model CP-BG

# Flameproof & Hazardous Location Break Glass Call Point

Federal Signal's multi-purpose Break Glass Call Points are compatible with a wide range of flameproof and hazardous location applications. These models feature a UV stable, heat, impact and corrosion resistant, anti-static GRP (Glass Reinforced Polyester) housing. Call Points are ideal for both onshore and offshore applications for activating emergency equipment, audible and visual signals or control panel notification or Fire Alarm activation.

Our Call Point models offer an optional dual color unique LED indicator. The dual color LED indicator displays Green when the unit is in "Normal" or standby mode, and changes to Red when the unit is in "Alarm" mode.

An optional clear polycarbonate lift flap converts any single step device into a two-step device to prevent accidental activation. Lift flaps are also available with four label options with instructions on how to activate the device. Additionally, the integrated tool reset key can be removed to provide a secure tamper resistant option. A variety of modular end of line resistors, series resistors and supervisory diodes are available for up to two modules per model. Modules are easily replaceable and are field installed.

Each Call Point unit comes standard with eight field-installable faceplate labels: FIRE, EVAC, BIOHAZARD, GAS, EMERGENCY, SHUTDOWN, LOCKDOWN, and evacuation logo. For harsher environments, four optional stainless steel faceplate labels are also available: FIRE, EVAC, BIOHAZARD and GAS ALARM. If the application requires a custom faceplate label, the faceplate's labeling surface will accept end-user supplied U-Line #S-19297 weather-resistant labels for laser printers.


## FEATURES

- High visibility, anti-static GRP enclosure faceplate available in Red, Yellow, Blue, Green and Black
- Optional lift flap for two-step operation to prevent accidental activation
- 3 x M20 or 1/2" NPT entries: 2 top and 1 side entry with 180 degrees rotatable mounting orientation
- Integrated tool reset with removable key for tamper resistant reset<sup>1</sup>
- Assembled with external 316 stainless steel hardware
- Single and dual switch activation available
- Press down cage clamp or screw down terminal block options
- Optional side mounted break glass hammer<sup>2</sup>
- Optional dual color indicator LED
- Optional field installed stainless steel faceplate labels and duty labels<sup>2</sup>
- Optional modular EOL resistors, series resistors and supervisory diode
- EN54-11 models available
- IP66 enclosure
- IP69K Compliant
- CE compliant
- IECEx/ATEX rated, Zone 1, 21, Gas Group IIC

<sup>1</sup> EN54-11 models cannot have the reset keyway installed during operation

<sup>2</sup> Units can include either a stainless steel duty label or a break glass hammer

## Flameproof & Hazardous Location Break Glass Call Point (CP-BG)

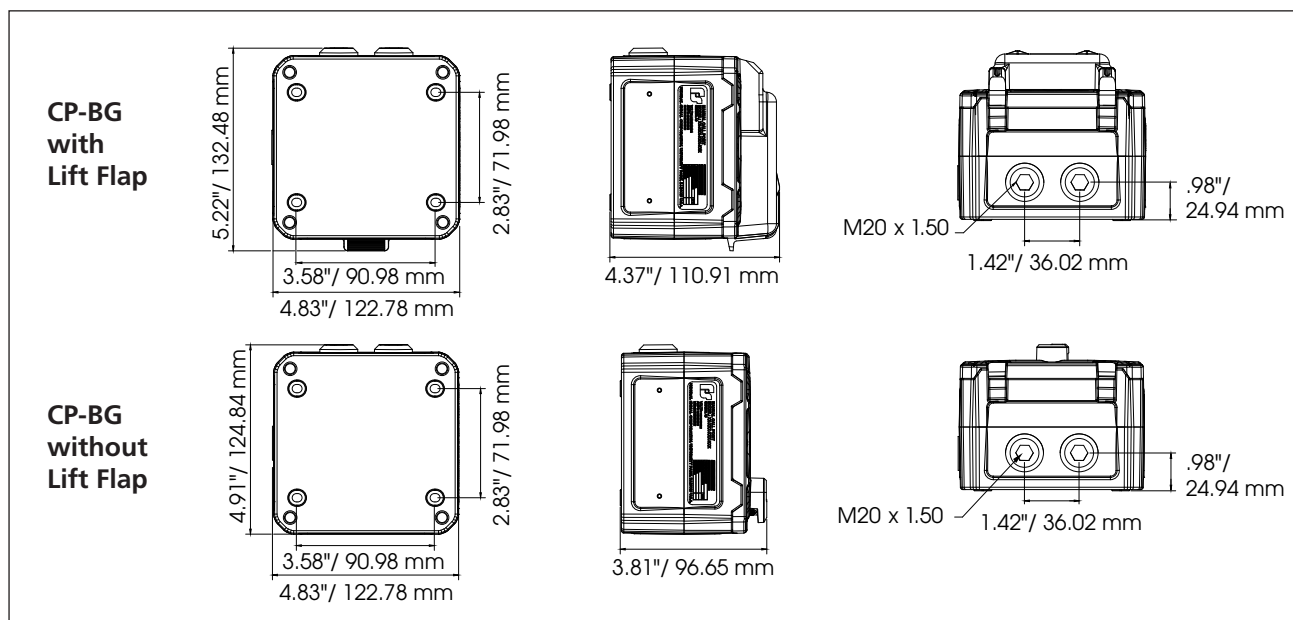

### SPECIFICATIONS

ATEX/IECEX Certification Marking: II 2 G Ex db eb mb IIC T4 Gb  
 Tamb = -40°C To +70°C  
 II 2 D Ex tb IIIC T100°C Db IP66

Ex Standards Certified to:

60079-0, 60079-1, 60079-7, 60079-18, And 60079-31

Ambient Operating: -40°C to 70°C -40°F to 158°F

Ingress Protection: IP66

Housing Materials: GRP, Glass Reinforced Polyester

En54-11 Color Requirement: Faceplate RAL3000 Red,  
 Housing Black

Cable Entries: 2 X M20 or 1/2" NPT top or bottom reversible; 1 x M20 or 1/2" NPT side

End of the Line Resistor Values: 1kΩ – 47kΩ

Electrical Rating: 48V max.

Series Resistor Values: 1kΩ – 47kΩ

Diode Module Value: 1n5406

Net Weight: 3.03 Lbs 1.4 Kg

Shipping Weight: 3.83 Lbs 1.7 Kg

### HOW TO ORDER

CP	BG	M	R	L	FAH	24	1
MODEL	ACTIVATION	ENTRIES	COLOR	SWITCH	LIFT FLAP/BG HAMMER	INDICATOR LED <sup>1</sup>	CERTIFICATION
CP	BG Break Glass	M M20 N 1/2" NPT	R Red Y Yellow K Black B Blue G Green	S Single, Clamp Terminal D Dual, Clamp Terminal L LED, Clamp Terminal <sup>1</sup> 1 Single, Screw Terminal 2 Dual, Screw Terminal 3 LED, Screw Terminal <sup>1</sup>	NNN No lift flap, no label, no hammer NNH No lift flap, no label, hammer FNN Lift flap, no label, no hammer FAN Lift flap, activate label <sup>2</sup> , no hammer <sup>3</sup> FFN Lift flap, fire label <sup>4</sup> , no hammer FNH Lift flap, no label, hammer FAH Lift flap, activate label <sup>2</sup> , hammer <sup>3</sup> FFH Lift flap, fire label <sup>4</sup> , hammer	00 None 06 6V 12 12V 24 24V 48 48V	1 ATEX/IECEX 2 EN54-11

<sup>1</sup> Units with Indicator LED option must use LED Switch options L or 3. Dual switches are unavailable with LED option.

<sup>2</sup> TO ACTIVATE BREAK GLASS lift flap instruction label

<sup>3</sup> Not available on EN54-11 Certified models

<sup>4</sup> IN CASE OF FIRE BREAK GLASS lift flap instruction label

Patent No. 10,410,510 B2

#850000977 Rev. A1