

# DATASHEET - BC 125 Ex BEACON /LIGHT

## AUDIBLE & VISUAL SIGNALLING EQUIPMENT



### DESCRIPTION - BC 125 Ex BEACON /LIGHT

This beacon is certified for use in Atex/explosive atmosphere, zone 1 & 2 for gas and zone 21 & 22 for dust. It is dedicated for Oil & Gas, chemical, petrochemical, pharmacy industries, marine and Offshore applications. It's designed for corrosive environments and hazardous area. The BC125 can also be used as status light.

This beacon can be delivered with two different light sources; LED with steady, rotary, fixed or blinking led of different powers. Flashing with XENON tube of different powers.

Four flashing frequencies are selectable.

Optional it is possible to control the beacon via a telephone line.

Housing is made of stainless steel 316L covered with UV resistant paint, the lens is made of borosilicate glass.

A complete range of accessories is available to customize a products. (see accessories annex)




- zone 1 & 2
- zone 21 & 22

### PRODUCT CODE CONFIGURATOR

LENS COLOR	TYPE	POWER	VOLTAGE	DUTY LABEL	TAG LABEL	LENS GUARD	CABLE ENTRY	FINISH COLOR	TELEPHONE INITIATED
■ R = RED	X = Xenon	05 LED: 5W Xenon: 5J	DC 12 .. 48V DC	Y = Yes	Y = Yes	Y = Yes	A = M20	■ RD = RED	Y = Yes
■ A = AMBER		10 LED: 10W Xenon: 10J	AC1 12..48V AC				B = M25	■ YW = YELLOW	
■ B = BLUE							C = 1/2" NPT	■ BU = BLUE	
■ G = GREEN	L = LED	15 Xenon: 15J	AC 100 .. 240V AC	N = No	N = No	N = No	D = 3/4" NPT	■ BL = BLACK	N = No
■ C = CLEAR		21 Xenon: 21J	OR (Other Request)					□ OR = OTHER ON REQUEST	

### ADD THE CODES RELATED TO THE FEATURES REQUIRED TO BC125:


--	--	--	--	--	--	--	--	--	--

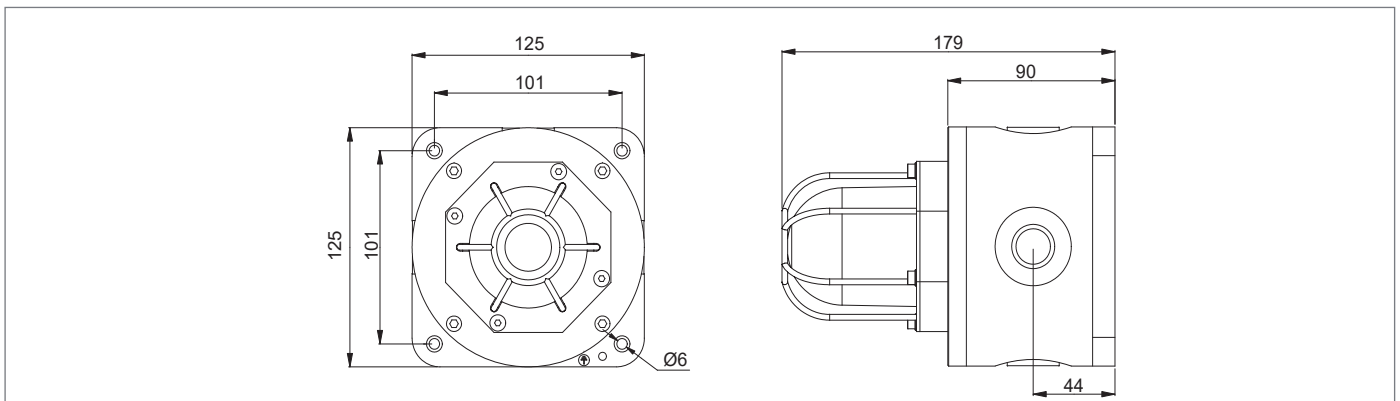

# DATASHEET - BC 125 Ex BEACON /LIGHT

## AUDIBLE & VISUAL SIGNALLING EQUIPMENT

### TECHNICAL DATA

<b>MATERIAL</b>	• <b>ENCLOSURE:</b> Stainless steel 316L	• <b>LENS:</b> Tempered borosilicate glass 3.3
<b>COLOUR</b>	• <b>RED</b> : RAL 3001 - <b>YELLOW**</b> : RAL1018 - <b>BLUE**</b> : RAL5005 - <b>BLACK**</b> : RAL9005	
<b>INGRESS PROTECTION</b>	• IP66/67	
<b>AMBIENT TEMPERATURE FOR OPERATION</b>	• <b>T6</b> = - 40°C ~ + 55°C , <b>T5</b> = - 40°C ~ + 60°C, <b>T4</b> = - 40°C ~ + 70°C	
<b>CERTIFICATION</b>	• <b>Nemko</b> 13 ATEX 1561X, IECEx NEM 13.0030X	
<b>EX CODE</b>	•  II 2 GD Ex d IIC T4 ~ T6 Gb, Ex tb IIIC T135°C ~T85°C,	
<b>STANDARD</b>	• EN / IEC 60079-0, EN / IEC 60079-1, EN / IEC 60079-31	
<b>ATEX AREA ZONE</b>	• <b>Gas zone:</b> 1 & 2 <b>Dust zone:</b> 21 & 22	
<b>CANDELA LENS COLOR</b>	• <b>Red:</b> 0.15	• <b>Amber:</b> 0.51
	• <b>Blue:</b> 0.12	• <b>Green:</b> 0.49
	• <b>Clear:</b> 1	
<b>LIGHT TYPE</b>	Flash tube (XENON) LED	
<b>TRUE LIGHT INTENSITY</b>	• <b>5 joules</b> = 109 Cd	• <b>10 joules</b> = 293 Cd
	• <b>15 joules</b> = 395 cd	• <b>21 joules</b> = 424 Cd
<b>PEAK LIGHT INTENSITY</b>	• <b>5 joules</b> = 35970 Cd	• <b>10 joules</b> = 66804 Cd
	• <b>15 joules</b> = 83345 Cd	• <b>21 joules</b> = 95824 Cd
<b>TIME LIFE</b>	• Emissions are reduced to 70% after 8 million flashes	
<b>BLINKING OR ROTARY FREQUENCY</b> (0 = steady status)	• 60/80/120 times/min • 100/120/150 times/min • 120/150/180 times/min	• >50 000 hours without luminosity decreasing • 60/75/0 times/min • 60/75/100 times/min • 75/95/0 times/min • 75/95/120 times/min
<b>CONSUMPTION</b>	• <b>5 Joules</b> = 10W	• <b>10 Joules</b> = 15W
	• <b>15 Joules</b> = 20W	• <b>21 Joules</b> = 25W
<b>AMBIENT HUMIDITY*</b>	• until 95%*	
<b>POWER SUPPLY</b>	• 12-48V DC	• 12-48V AC (50/60hz)
		• 100-240V AC (50/60hz)
<b>RATED IMPULSE WITHSTAND VOLTAGE</b>	• 1kV following IEC 61000-4-5	
<b>WORKING CURRENT LED</b>	• <b>Power</b>	<b>12V DC</b> <b>24V DC</b> <b>48V DC</b> <b>110V AC</b> <b>220V AC</b>
	• <b>5W</b>	530 mA    260 mA    120 mA    80 mA    40 mA
	• <b>10W</b>	1100 mA    530 mA    240 mA    160 mA    80 mA
<b>WORKING CURRENT XENON</b>	• <b>Energy</b>	<b>12V DC</b> <b>24V DC</b> <b>48V DC</b> <b>110V AC</b> <b>220V AC</b>
	• <b>5J</b>	460 mA    280 mA    140 mA    60 mA    35 mA
	• <b>10J</b>	850 mA    490 mA    250 mA    100 mA    60 mA
	• <b>15J</b>	1200 mA    700 mA    360 mA    140 mA    80 mA
	• <b>21J</b>	NA    960 mA    480 mA    180 mA    110 mA
<b>CABLES ENTRY</b>	• 4 x M20, M25**, 1/2" NPT**, 3/4" NPT** or other** (Specify)	
<b>TERMINAL</b>	• From 22 to 14 AWG - from 0.50 mm <sup>2</sup> to 2.5 mm <sup>2</sup>	
<b>NET WEIGHT</b>	• 4.5 Kg	
<b>EXTERNAL TRIGGER**</b>	• 25Hz <f<50Hz    40V<u<100V    Z = 2k Ohms	

\* = without runoff - \*\* = optional - cable gland and blind plug not provided

### MEANING OF LENS COLOR USAGE IN THE INTERNATIONAL STANDARD (IEC 60073)

COLOR	MEANING	ACTION	EXAMPLE
■ RED	EMERGENT	Dangerous state Take immediat action	• Pressure/Temperature beyond the safe state - Shutdown due to the action of protective devices - Fire alarm - Equipment failure alarm
■ AMBER	ABNORMAL	Abnormal state, near the critical status	• Pressure/Temperature above the normal range - Protective device released - Toxic and harmful gases release alarm
■ GREEN	SAFE	Normal state	• Pressure/Temperature in normal state - Automatic control system is operating normally
■ BLUE	MANDATORY	Requires operator's action	• Emergency evacuation - Abandon rescue and escape - Abandon platform or abandon ship - Enter the command
■ CLEAR	NO SPECIAL SIGNIFICANCE	If uncertainty for other colors, clear is allowed to be used	• General information - Can't exactly use red, yellow, green or blue - Used for the implementation of command - Indicate the measured values