



**METRIC SIZES!**

PES8M

**EXCLUSIVE FEATURES**

## PE SQUEEZE-OFF TOOLS

### FEATURES

- Robust aluminum bars on PES2 and larger models reduce tool weight for **easier handling**.
- Positive stops **prevent damage** caused by over-clamping.
- Easy to use in line because of swing bar and **no loose parts**.
- PES1 built-in stops and "C" shape allow easy movement on and off pipe.
- **With the proper stops**, PES2, PES4, PES6 and PES8 also work for metric pipe.
- Double-bar design on PES2-2 models gives two squeeze points in a row which provide better shut-off and **extra protection** against leaks, all in one tool.
- Wide variety of stops for all Reed PE squeeze-off tools.

Reed offers the best designed tools for stopping flow in 1/2" up to 8" PE pipe. Different models handle a wide range of pipe sizes and applications. Sliding bar handles make work in tight places easier and increase leverage for tightening. Fine-pitched thread on feed screw allows for a controlled, low-effort squeeze. Grease fittings at friction points make operation smoother and extend tool life. Aluminum bars are anodized or painted for protection from the elements. All PE squeeze-off tools use positive stops to prevent damage caused by over-clamping. Multiple size/SDR settings on one pair of stops provide quick, convenient over-squeeze protection for standard pipe sizes.

*NOTE: Reed strongly recommends use of the [GROUNDING ACCESSORY ON P. 35](#) with PE Squeeze-Off Tools. Use a grounding accessory as a precaution against static build-up. Dissipate the charge and minimize the possibility of ignition.*

Catalog No.	Item Code	Capacity		Pipe/SDR Stops		Length		Weight	
		in-nom.	actual O.D.	# of Stops	Stops	in	mm	lbs	kg
PES1IPS/CTS*	04290	1/2 - 1	.63" - 1.32"	4	94279	11	280	6.5	3.0
PES2IPS	04302	1/2 - 2	.84" - 2.38"	6	98079	14	305	11.6	5.3
PES2CTS	04304	1/2 - 2	.63" - 2.13"	6	98078	14	305	11.6	5.3
PES4	04306	2 - 4	2.38" - 4.50"	7	98094	21	508	38.6	17.5
PES2-2IPS	04322	1/2 - 2	.84" - 2.38"	6	98079	12	305	11.6	5.3
PES2-2CTS	04324	1/2 - 2	.63" - 2.13"	6	98078	12	305	11.6	5.3
PES2METRIC	04703	-	20 - 63 mm	6	98124	12	305	11.6	5.3
PES4METRIC	04705	-	75 - 110 mm	6	98121	20	508	38.6	17.5

\*All steel construction.

**BEST EVER!**

PES1IPS/CTS



## HYDRAULIC & MANUAL, LARGE DIAMETER

### FEATURES

- Manual PES6M and PES8M are lower-price and lighter-weight than the hydraulic models, making them practical for carry-in jobs, infrequent use or budget-minded work crews.
- PES8H handles large diameters with ease due to its included, separate hydraulic hand pump that allows the operator to work the pump from a convenient surface.

Catalog No.	Item Code	Capacity		Power Source	Pipe/SDR Stops		Length		Gross Weight*	
		in-nom.	actual O.D. mm		# of Stops	Stops (pair of each)	in	mm	lbs	kg
PES8M	04308	3 - 8	89 - 219	Manual	12	98319 & 98320	28	711	148	67.3
PES8H	04309	3 - 8	89 - 219	Hydraulic	12	98319 & 98320	28	711	227	103.2
PES6M	04313	3 - 6	89 - 168	Manual	10	98356 & 98320	28	711	92	41.8
★ <b>PES6METRIC</b>	04706	-	90 - 160		10	98360 & 98319SO pair of each	28	711	81	36.8
★ <b>PES8HMETRIC</b>	04707	-	90 - 200		10	98360 & 98319SO pair of each	28	711	130	59.1
★ <b>PES8MMETRIC</b>	04708	-	90 - 200		10	98360 & 98319SO pair of each	28	711	81	36.8

★ **NEW**

*NOTE: PE Squeeze-Off Tools conform to ASTM F1041 and F1563.*


*\*GROSS WEIGHT includes all components plus packaging.*

**PES2 models fit both CTS and IPS PE by simply changing the safety stops.**

PES4



PES2-2CTS

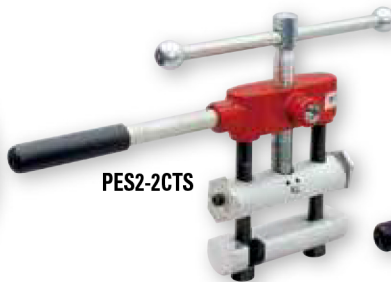

PES2CTS

