



Threaded Coupler for Copper-Bonded Ground Rod, Threaded – CR34

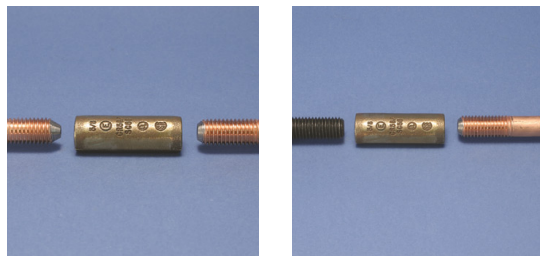

- High-strength couplings are threaded and chamfered at both ends for easy driving
- Corrosion-resistant couplings ensure permanent, low resistance copper-to-copper connections



Part Number	CR34
Material	Bronze
Ground Rod Diameter, Nominal	3/4"
Length (L)	76.2 mm
Thread Size (TS)	3/4 UNC
Unit Weight	0.15 kg
Certifications	CSA 46866 cULus Qualifoudre RUS
Standard Packaging Quantity	25 pc
UPC	78285630674
EAN-13	0782856306740

CSA, CSA-US and C-CSA-US are registered trademarks of Canadian Standards Association. UL, UR, cUL, cUR, cULus and cURus are registered certification marks of UL LLC.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2019 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.