

# 1.85/1

## PROFESSIONAL PLASTIC BEARING INSTALLATION SET

- > Sturdy plastic bearing installation set.
- > Impact resistant plastic is light but as robust as metal variants.
- > This set guarantees that the installed bearings will not suffer the damage that might have occurred when working 'metal to metal'.
- > Ensures no deformations of the bearing housings, sealing rings or shafts.



Code	No.	Contents	
1120778	1.85/1	33 impact rings, 10-50mm for external Ø 26-110mm 3 aluminium impact sleeves 1 recoil-free bodywork hammer with nylon heads (1.2kg)	5.2

# 1101-1.29/3K

## BALL BEARING EXTRACTOR SET

- > Ball bearing extractor set for more than 40 ball bearings.
- > For removing ball bearings that are both on a shaft and in a housing.
- > Non-destructive removal of deep-groove ball bearings without dismantling the shaft; no necessity to drill open the bearing cage (no chippings).
- > With Check-Tool insert.
- > Insert for use in drawers with minimum dimensions 340 x 260 x 60mm.
- > In GEDORE i-BOXX® 72 No. 1101 L.
- > Dimensions: 367 x 316 x 72mm.



Code	No.	Contents	For ball bearing No.	
2964392	1101-1.29/3K	4 Heads with spindle no. 1.29/1-1.29/5 7 Heads with spindle no. 1.29/10-1.29/45 1 Handle no. 1.29/0	6000 6001 6002 6003 6004 6005 6006 6007 6008 6009 6010 6011 6012 6200 6201 6202 6203 6204 6205 6206 6207 6208 6209 6210 6211 6212 6213 6300 6301 6302 6303 6304 6305 6306 6307 6308 6309 6310 6311 6403 6404 6405 6406 6407	5.8

# 8551

## BOLT EXTRACTOR SET

- > Made from Chrome Vanadium steel-35HRC.
- > In sturdy plastic case.

**Operation**

- > Drill a central hole into the broken bolt.
- > Turn the bolt extractor to the left into the hole until it grips and removes the bolt.
- > Always use the maximum extractor size.




Code	No.	
6759890	8551-88 Bolt Extractor Set	0.724
<b>Sizes</b>	1 2 3 4 5 6 7 8	

# 1.73

## UNIVERSAL BALL JOINT PULLER

- > For removing ball joints on cars.

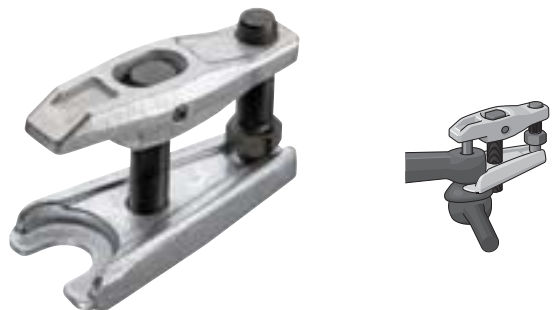

Code	No.	Clamping height	Fork Depth	mm	
8030810	1.73/1	65	24	23	0.730