



P14 Position Coupler, Plain, Worldwide Design



- Designed to splice the same diameter bars
- Designed to splice two curved, bent or straight bars, when neither bar can be rotated and where the ongoing bar is free to move in its axial direction

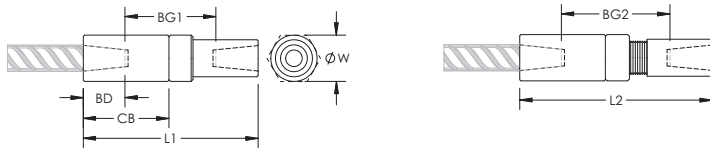

Material: Steel

Finish: Plain

Design Version: Worldwide (Globally Available Materials)

Part Number	Rebar Size, Metric (mm)	Rebar Size, US	Rebar Size, Canada (M)	W	Ø (mm)	L1 (mm)	L2 (mm)	BD (mm)	BG1 (mm)	BG2 (mm)	CB (mm)	Unit Weight (kg)	Certifications
EL10P14LN	10	#3	-	-	25	94	101	18	58	65	42	0.27	ITB
EL12P14LN	12	#4	10	-	25	98	105	19	60	67	46	0.26	ITB
EL14P14LN	14	-	-	-	25	105	112	21	63	70	51	0.26	ITB
EL16P14LN	16	#5	15	-	30	112	119	24	64	71	54	0.44	ITB
EL18P14LN	18	-	-	-	35	125	131	29	67	73	61	0.58	ITB
EL20P14LN	20	#6	20	-	35	152	163	35	82	93	76	0.76	ITB
EL22P14LN	22	#7	-	-	40	160	172	37	86	98	80	1.09	ITB
EL25P14LN	25	#8	25	-	45	169	180	40	89	100	86	1.32	ITB
EL28P14LN	28	#9	30	-	50	175	187	42	91	103	90	1.72	ITB
EL30P14LN	30	-	-	-	55	198	209	52	94	105	102	2.19	-
EL32P14LN	32	#10	-	-	60	192	203	45	102	113	96	2.72	ITB
EL34P14LN	34	-	-	-	60	213	224	55	103	114	107	2.83	-
EL36P14LN	36	#11	35	-	65	207	218	52	103	114	105	3.37	-
EL38P14LN	38	#12	-	-	70	212	223	53	106	117	106	4.12	-
EL40P14LN	40	-	-	-	70	221	232	57	107	118	112	4.14	ITB
EL43TP14LN	43	#14	45	-	75	274	295	66	142	163	142	5.99	-
EL50TP14LN	50	-	-	-	90	287	308	70	147	168	148	8.52	-
EL57TP14LN	57	#18	55	-	100	320	341	83	154	175	168	12.05	-

Designed to Meet

AASHTO, ABNT NBR 8548:1984, ACI 318 Type 1 (125% Specified Yield), ACI 318 Type 2 (Specified Tensile), ACI 349, ACI 359, AS3600, BS EN 1992-1-1, BS EN 1992-2, CAN/CSA - N287.2/.3/.4, DIN EN 1992-1-1, Eurocode 2, IBC Type 1 (125% Specified Yield), IBC Type 2 (Specified Tensile), ISO 15835, NEN EN 1992-1-1, NF A 35-020-1, NF EN 1992-1-1, ÖNORM EN 1992-1-1, Sellafield Ltd. Std. ES_0_3110, US Army Corps of Engineers

Bar dimensions and weights listed may vary by region. Coupler sizes not shown may be available by special order. Contact your nVent LENTON representative for more information.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.