



D14 Mechanical Anchor, Plain, Worldwide Design



- Replaces conventional hooked reinforcing bar
- Simplifies reinforcing bar placement and lowers placing costs
- Head area exceeds 10x bar area (net 9x)

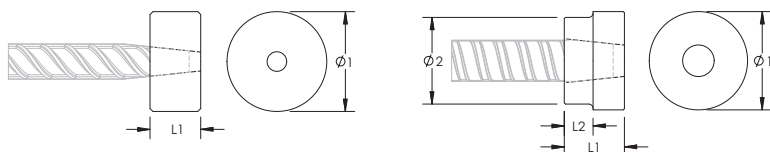

Material: Steel

Finish: Plain

Design Version: Worldwide (Globally Available Materials)

Part Number	Rebar Size, Metric	Rebar Size, US	Rebar Size, Canada	Diameter 1 Ø1	Diameter 2 Ø2	Length 1 L1	Length 2 L2	Unit Weight	Certifications
EL10D14N	10 mm	#3	-	35 mm	-	18 mm	-	0.12 kg	ITB
EL12D14N	12 mm	#4	10M	45 mm	-	18 mm	-	0.21 kg	ITB
EL14D14N	14 mm	-	-	45 mm	-	21 mm	-	0.24 kg	ITB
EL16D14N	16 mm	#5	15M	55 mm	-	24 mm	-	0.41 kg	ITB
EL18D14N	18 mm	-	-	60 mm	-	29 mm	-	0.60 kg	ITB
EL20D14N	20 mm	#6	20M	65 mm	-	35 mm	-	0.83 kg	ITB
EL22D14N	22 mm	#7	-	70 mm	-	37 mm	-	1.03 kg	ITB
EL25D14N	25 mm	#8	25M	80 mm	-	40 mm	-	1.43 kg	ITB
EL28D14N	28 mm	#9	30M	95 mm	80 mm	42 mm	25 mm	1.93 kg	ITB
EL30D14N	30 mm	-	-	95 mm	80 mm	52 mm	25 mm	2.48 kg	-
EL32D14N	32 mm	#10	-	105 mm	80 mm	45 mm	25 mm	2.35 kg	ITB
EL34D14N	34 mm	-	-	110 mm	80 mm	55 mm	25 mm	3.23 kg	-
EL36D14N	36 mm	#11	35M	115 mm	80 mm	52 mm	25 mm	3.16 kg	-
EL38D14N	38 mm	#12	-	120 mm	80 mm	53 mm	25 mm	3.49 kg	-
EL40D14N	40 mm	-	-	130 mm	58 mm	57 mm	26 mm	6.00 kg	ITB
EL50TD14N	50 mm	-	-	160 mm	80 mm	71 mm	38 mm	11.25 kg	-

Designed to Meet

ACI 318, AS3600, ASTM A970

Bar dimensions and weights listed may vary by region. Coupler sizes not shown may be available by special order. Contact your nVent LENTON representative for more information. Thread does not need to be flush with end of nVent LENTON Terminator. Thread may be +/- 2 threads from backside of coupler.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

© 2020 nVent All rights reserved

nVent, nVent CADDY, nVent ERICO, nVent ERIFLEX and nVent LENTON are owned by nVent or its global affiliates.

All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.